
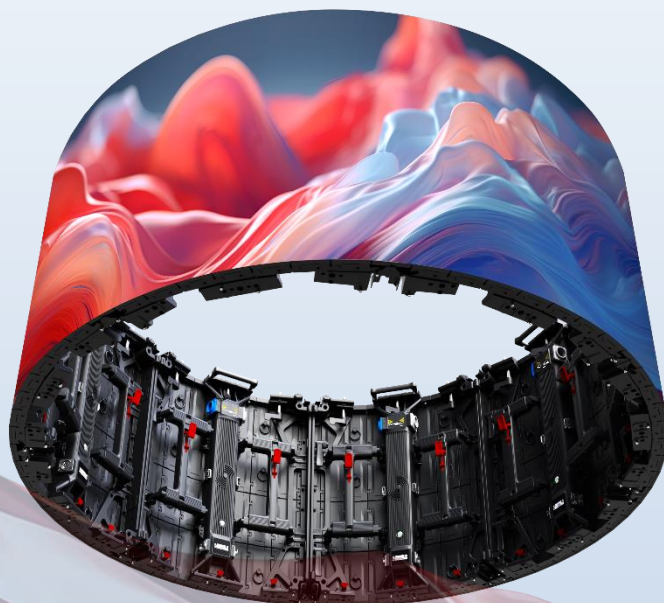


Curved MINI LED Series

AMERICAN
LED WALL COMPANY

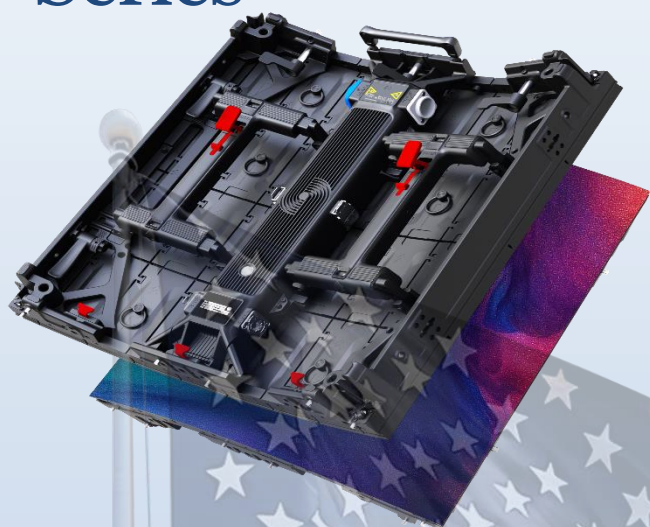

Specifications

Model Name	C1.9Mini	C2.6Mini
Pixel Pitch (mm)	1.95	2.6
Pixel Density (dot/m ²)	262,144	147,456
LED Type	Mini 4in1	
Module Resolution (PX×PX)	128×128	96×96
Curving (Concave & Convex)	Concave 6°–Convex 6°	
Brightness (cd/m ²)	1,000 / 1,200 / 1,500	
Grey Scale (bit)	14 / 15 / 16	
Refresh Rate (Hz)	3,840 / 7,680	
Scan Rate	1/16 / 1/8	1/32 / 1/16 / 1/8
Horizontal Viewing Angle (Deg)	160°	
Vertical Viewing Angle (Deg)	140°	
Max Power Consumption (W/m ²)	440±5% / 520±5% / 560±5%	
Average Power Consumption (W/m ²)	135±5% / 160±5% / 170±5%	
Module Size (mm × mm)	250×250×24.8	
Module Weight (kg)	0.65	
Cabinet Size (mm × mm)	500×500×80	
Cabinet Weight (Kg/m ²)	31.2	
Input Voltage (V)	AC110–220V	
Working Temperature (°C)	–20~+50°C	
Working Humidity (RH)	10%–90% RH	
Maintenance Type	Front/Rear	
Ingress Protection	IP20	
Working Environment	Indoor	
Certificates	CE(EMC+LVD), CB, ETL, FCC	